


HSP14AB

4-Way 4K HDBaseT Splitter with Audio Breakout, EDID Management and HDMI loop out

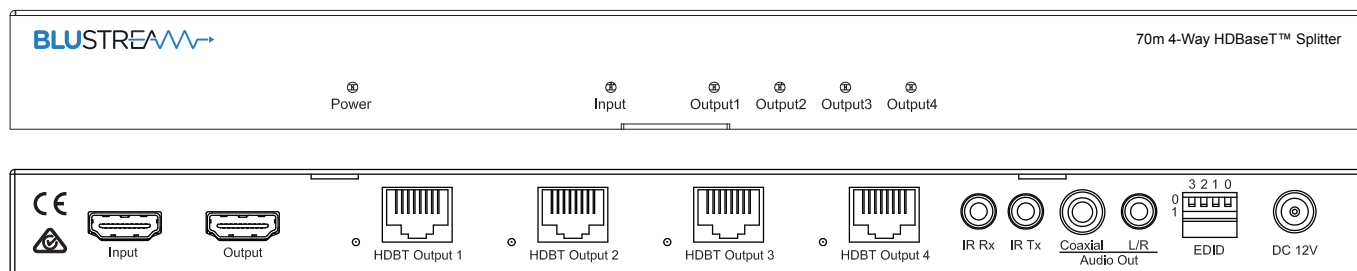

Description

Our HSP14AB 4K HDBaseT splitter distributes a single HDMI source to four simultaneous HDBaseT outputs. It transmits HDMI, Bi-directional IR and PoH (PoE) up to lengths of 70m over a single CAT cable. The 4-Way splitter also features audio breakout, EDID management and HDMI loop out for integrating local displays or cascading to multiple devices.



Specifications

Supports 4K UHD video up to 40m (3840 x 2160 @30Hz 4:4:4, 4096 x 2160 @24Hz 4:4:4, and 4K @60Hz 4:2:0)

Features 1x HDMI loop out for integrating local displays or cascading to multiple devices

Supports all industry standard video resolutions including VGA-WUXGA and 480i-4K

Transmit all signals up to distances of 70m over a single CAT6 cable (4K up to 40m)

Supports audio breakout via LPCM and Coaxial

Supports bi-directional IR from all input and output locations

Supports PoE (Power over Ethernet) to power compatible HDBaseT™ receivers

Supports LPCM 7.1CH, Dolby TrueHD, Dolby Digital Plus and DTS-HD Master Audio transmission

HDCP compliant

Supports 3D signal display